


**Notes:**

1. Temporary diversion ditch to be used to intercept flow and/or divert to an erosion control measure.
2. Positive grade must be provided to assure drainage.
3. Ditches should be stabilized with appropriate vegetation and/or liner per calculations.
4. Inspect temporary diversions once a week and after every rainfall.
5. Immediately remove sediment from the flow area and repair the diversion ridge.
6. Carefully check outlets and make timely repairs as needed.
7. When the area protected is permanently stabilized, remove the ridge and the channel to blend with the natural ground level and appropriately stabilize it.



NOT TO SCALE

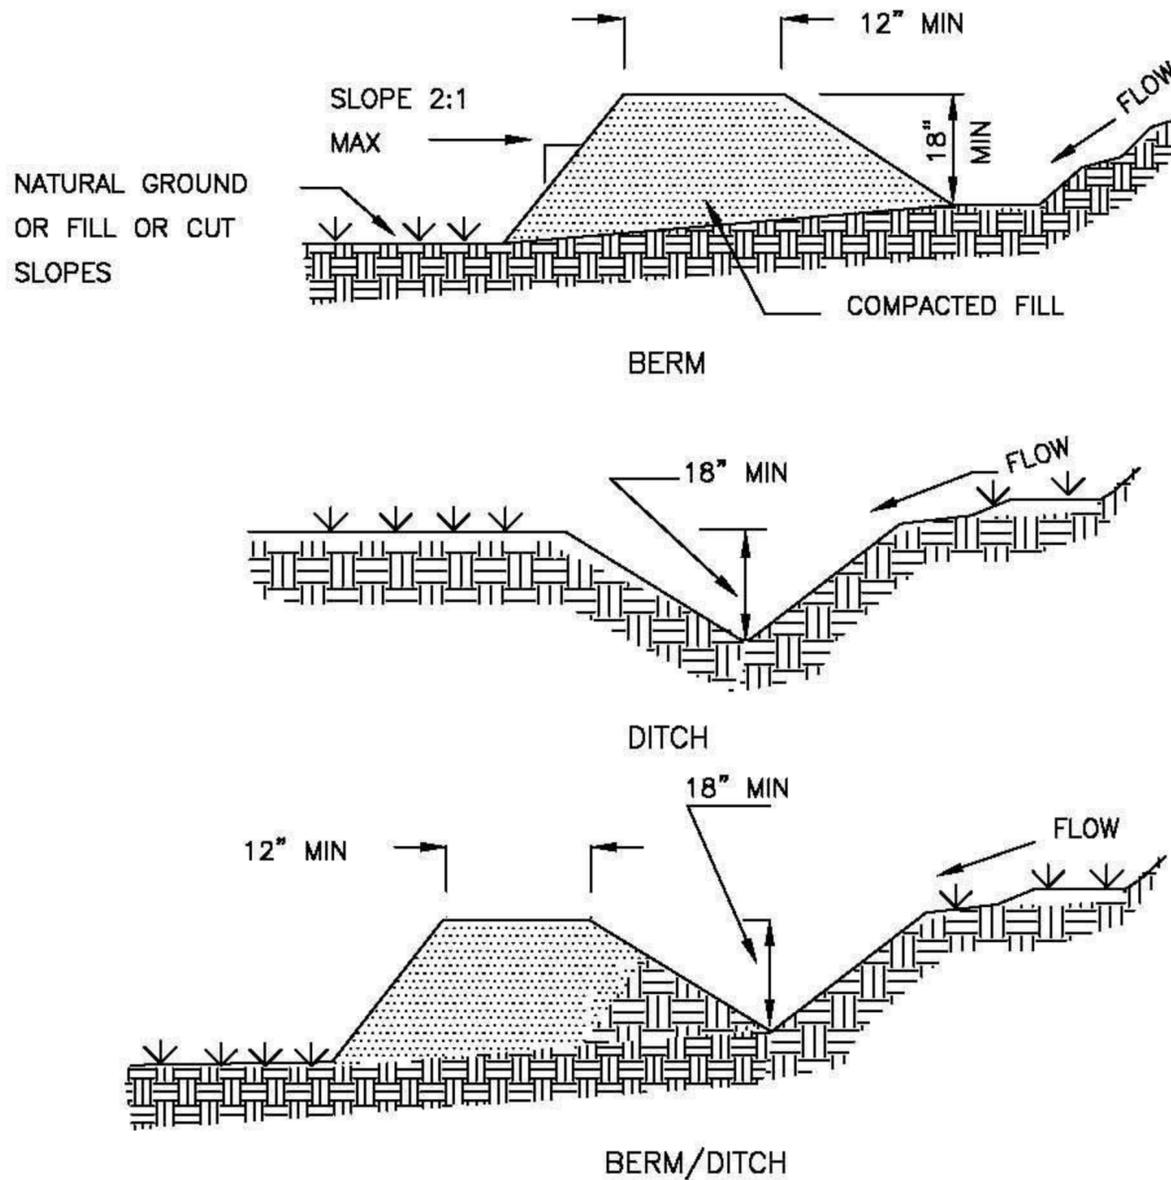

EROSION CONTROL DETAIL  
 DURHAM COUNTY, NC  
 ENGINEERING DEPARTMENT

DIVERSION DITCH DETAIL

REV:

DATE	ID
02/09	DD - 1